

SEMI-AUTOMATIC NET WEIGHT LIQUID FILLING MACHINES - SE SERIES

ELECTRONIC NET WEIGHT FILLING MACHINE FOR KEGS, DRUMS, AND TOTES



Ideal-Pak PT-IF Filling Machine with powered in-feed, out-feed and scale conveyors, plus ground fault indicator, Type X Purge Controller (optional) - *Inside Fill Configuration*.

CONTAINER SIZE

Small Containers			
1/2 Pint			Pails
Pints	•		Kegs
Quarts	•		Drums
Gallons	•		Totes

INDUSTRIES SERVED

Paints & Coatings	
Chemicals	
Lubricants	
Food & Beverage	

PRODUCT OVERVIEW

The Ideal-Pak PT-IF drum and tote filling machine is designed to transport and fill a wide variety of drums and totes. A heavy duty powered in-feed conveyor moves empty totes and drums onto a powered scale conveyor for semi-automatic filling and transport to an exit conveyor.

IDEAL-PAK MODEL PT-IF FEATURES

- High Accuracy Net Weight Filling.
- Ideal-Pak precision crafted fill lance nozzle for inside filling.
- Allen-Bradley PLC for Machine Control.
- Color HMI Touch Screen Interface.
- Multiple conveyor configurations, including: gravity roller or powered conveyors in addition to zoned in-feed and out-feed powered conveyor sections.
- Simple Operation.
- Swing Arm & Slide to Position the Nozzle.
- Stainless Steel and Teflon Wetted Parts.



Ideal-Pak PT-IF fills a wide range of kegs, drums, totes, and pails, including 330 Gallon Plastic and 350 Gallon HDPE.

ABOUT IDEAL-PAK

Ideal-Pak Liquid Filling Machines are designed to increase your yields, productivity and efficiency. Choose from Automatic to Semi-Automatic or Manual Configurations to fill small containers up to drums and totes. Ideal-Pak serves customers in the paint and coatings, lubricants, chemicals and food & beverage industries.

Ideal-Pak is also your first source for a wide variety of closing machines, lid placers and precision nozzles, plus parts and service, (including Neupak).

May be covered by one or more of the following U.S. Patents: #5,505,233, #5,823,406, #6,148,877, #6,595,250




Semi-Automatic Net Weight Liquid Filling Machine for Drums and Totes

MACHINE SPECIFICATIONS

Electrical	120VAC, 1Ø, 60Hz
Air (per head)	60 SCFM @ 80 - 90 PSI (clean dry air)
Container Size	Speed - MPC (Minutes per container) Inside Fill Estimated Range*
30 Gallon Drum	1 - 3
55 Gallon Drum	1 - 3
Tote 330 Gallon	5 - 10
Accuracy: To Within ± 1.0 lbs	
*Estimated average range. Fill rates will vary depending on container size, container shape, fill opening, accuracy required, product supply, as well as individual product characteristics and operation mode.	

OPTIONS

- Connectivity to Factory Automation.
- Flush Attachments Connect To the Nozzle for Enclosed Cleaning.
- Gravity or Powered Roller Conveyors.
- Variety of Fill Lance sizes and types (stainless steel, polypropylene, Hastelloy) are available.
- Top Fill, Inside Fill, or Bottom Fill Machine Configurations.
- Type X Purge System.
- Valve, Regulator and Lubricator to Control Air Diaphragm Pump/Tranquilizer.

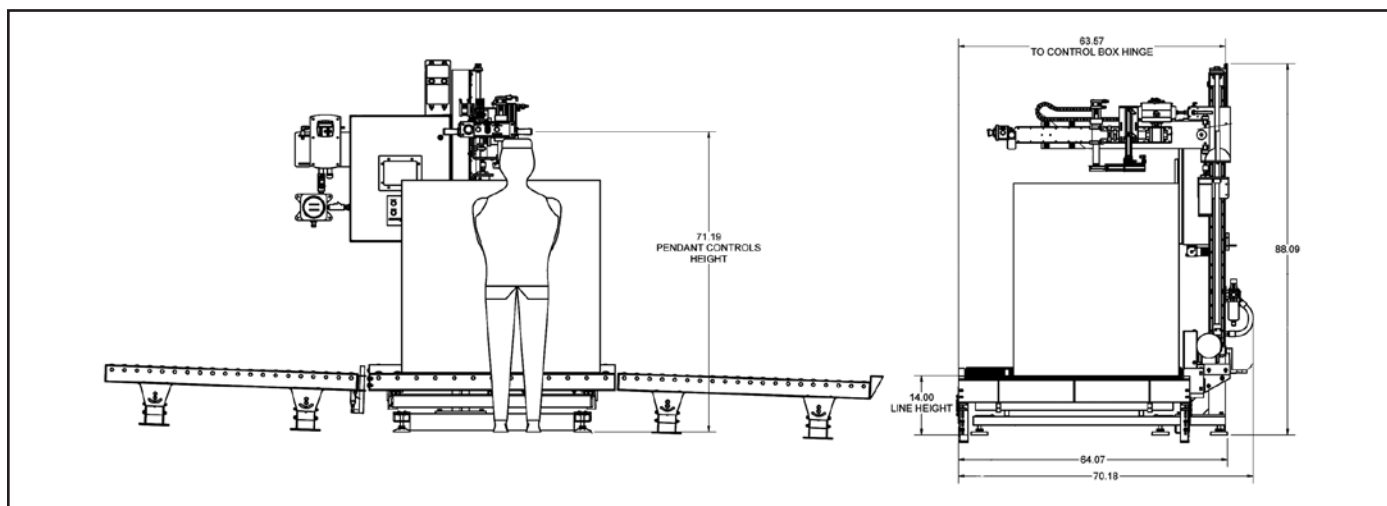

OPTIONS




5 GALLON FILLING AND CLOSING OPTIONS

DRIP CUP
- POWERED

DRIP CUP
- MECHANICAL

FUME
VENT

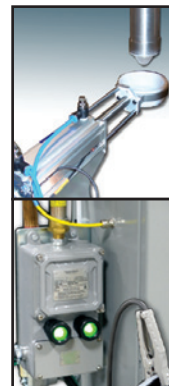

GROUND FAULT
INDICATOR

HMI

TYPE X PURGE
CONTROLLER

PT-IF Rev. 11-2015 May be covered by one or more of the following U.S. Patents: #5,505,233, #5,823,406, #6,148,877, #6,595,250. Subject to changes & modifications without notice.



Ideal-Pak Incorporated | 4607 Dovetail Drive | Madison, WI 53704
Phone: 608-241-1118 | Toll Free: 800-383-1128 | Fax: 608-241-4448 | www.ideal-pak.com